

CFW100 - Mini Drive



Variable Speed Drive

Technology is at your fingertips with the incredible smallest volume VSD in the market. The CFW100 is a single-phase variable speed drive developed for simple applications ranging from 0.18 kW to 0.75 kW (0.25 to 1 HP). A strong partner for OEMs, it gives induction motors a selectable scalar (V/F) or voltage vector control (VVW), HMI and plug and play philosophy, with easy and fast installation and operation.

The smallest VSD for 50 °C

Many applications...

at your fingertips!



Motor Power Range

0.18 to 0.75 kW (0.25 to 1 HP)

Characteristics

■ Robust

Overload current: 150% for 60 seconds
Ambient temperature: up to 50 °C

■ SoftPLC

PLC functions: making it a flexible and optimized solution

■ PID Controller

Performance: changes in pressure, flow or other external data

■ Communication Protocol

Modbus-RTU and CANopen by plug-in modules

■ Conformal Coating (Tropicalization) as Standard


Increasing the lifetime, protecting the electronic boards against corrosive atmospheres. Classified as 3C2 according to IEC 60721-3-3

Bluetooth®



Plug-in module CFW100-CBLT

Infrared Remote Control

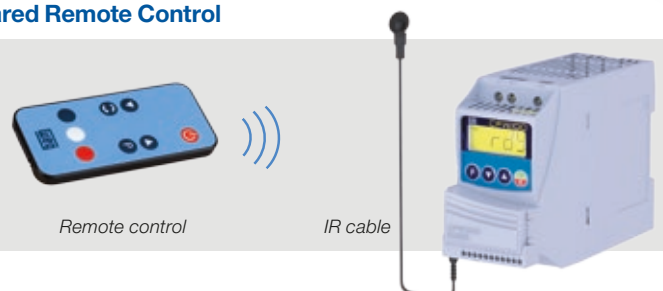

Remote control

IR cable


Plug-in module CFW100 - IOADR

CFW100 - Mini Drive

Variable Speed Drive



- Vector (V/W) and scalar (V/Hz) control
- Free Windows® based software Superdrive G2. Designed for parameter setting, controlling and monitoring the CFW100
- Centrifugal pumps
- Fans / Exhausters
- Process dosing pumps
- Lift doors
- Dryers
- Stirrers / Mixer
- Granulators / Palletize
- Rotary filters
- Roller tables
- Small handling applications

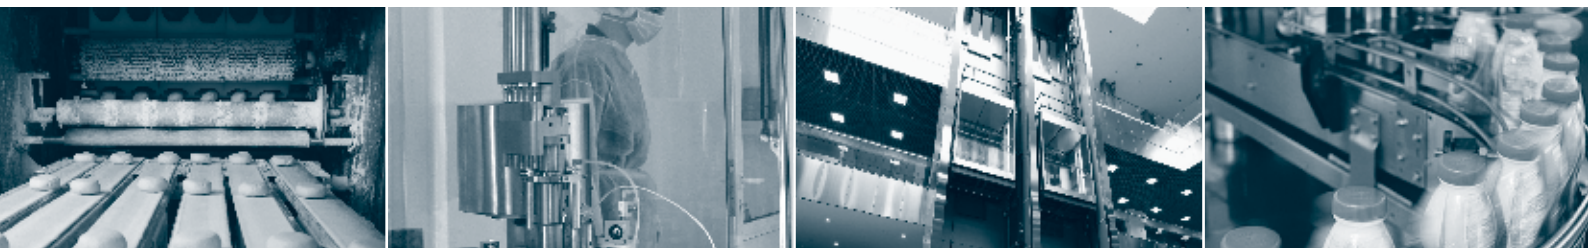

Drive Ratings

Power supply (V)		Variable speed drive - CFW100 ¹⁾			Maximum motor power ²⁾			
		Model	Size	Rated current (A)	IEC		NEMA	
					kW		HP	
Single-phase	230	CFW100A01P6S220	A	1.6	50 Hz - 220 V / 230 V	0.25	60 Hz - 230 V	1
		CFW100B02P6S220	B	2.6		0.55		1
		CFW100C04P2S220	C	4.2		1.1		1.5

Plug-in Modules Specification

Plug-in module	Options							
	Inputs		Output	USB	Bluetooth®	Infrared	Fieldbus communication	
	Analog	Digital	Digital relay				RS485	CANopen ³⁾
CFW100-IOAR	1	4	1	-	-	-	-	-
CFW100-CUSB	-	4	-	1	-	-	-	-
CFW100-CBLT	-	4	-	-	1	-	-	-
CFW100-IOADR	1	4	3	-	-	1	-	-
CFW100-CRS485	-	4	-	-	-	-	1	-
CFW100-CCAN	-	4	-	-	-	-	-	1

Notes: 1) CE and UL in progress;

2) Use motor power ratings above only as a guidance. Motors are rated for 220 V ac @ 50 Hz, 4-pole. The right way to size a VFD is matching its output current with the rated motor current;

3) Coming soon.

Remote operating interface (IHM)
CFW100-KHMIR



Flash memory
CFW100-MMF



Plug-in modules
(check above table)



Grupo WEG - Automation Business Unit
Jaraguá do Sul - SC - Brazil
Phone: +55 47 3276 4000
automacao@weg.net
www.weg.net

